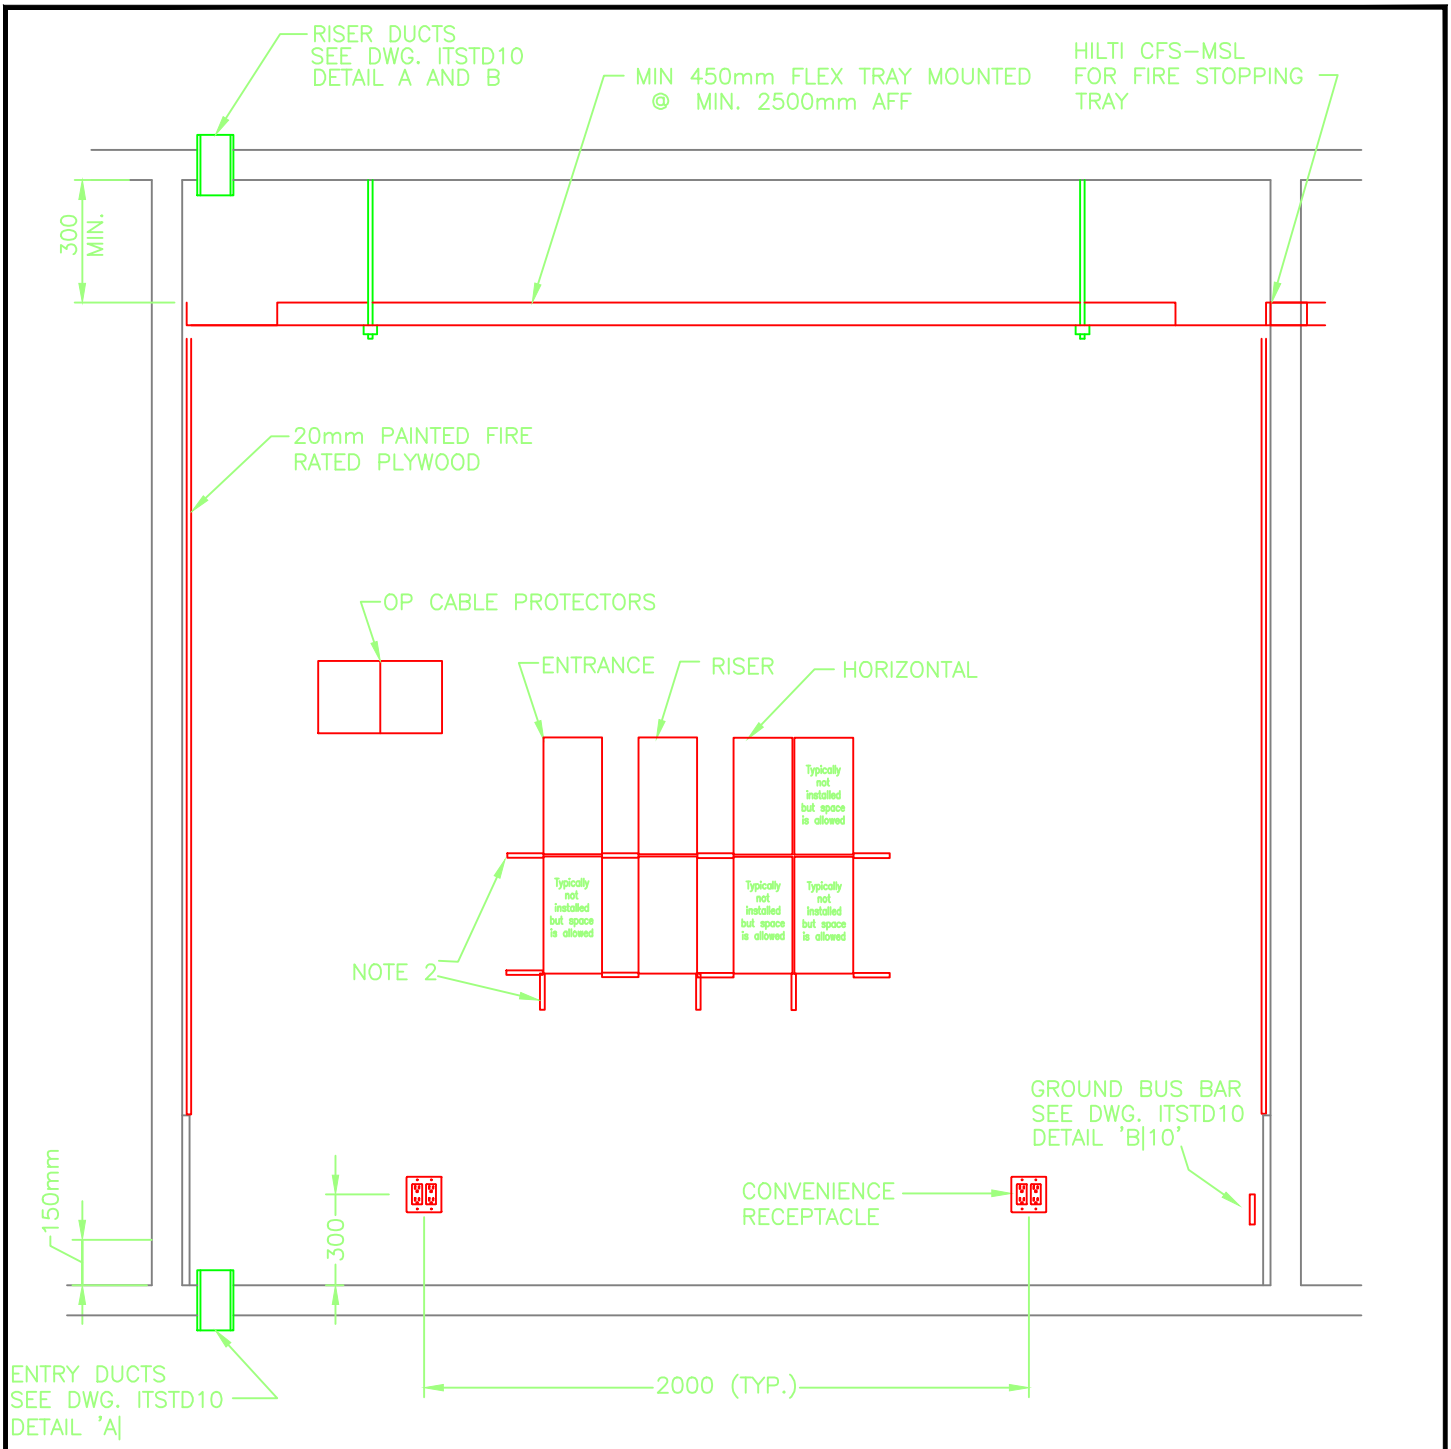

NOTES:

1. THIS DRAWING REPRESENTS THE VOICE TERMINAL LAYOUT IN A TYPICAL COMMUNICATIONS ROOM AND IS NOT TO BE TAKEN AS THE FINAL DESIGN.
2. ALL BIX RINGS MUST BE INSTALLED REGARDLESS OF BIX FRAME PRESENCE
3. HANG LIGHTS ON CHAIN TO ALLOW FOR FREE SWING ABOVE THE FLEX TRAY.
4. MOUNT GROUNDING BUS BAR AND POWER OUTLETS @ 300 mm AFF MEASURED FROM THE CENTER OF THE DEVICES.
5. 300mm OR MOUNTING HEIGHT TO MATCH EXISTING OUTLET MOUNTING HEIGHT IN THE SAME ROOM.
6. NO OUTLETS OR DEVICES WILL BE AFFIXED TO THE CENTRAL AREA OF THE PLYWOOD SHEATHING
7. CABLE ROUTING PATHS TAKE PRIORITY OVER DEVICE AND OUTLET POSITIONING

Sheet No.		BY	DATE
1 of 1	Drawn	DE	JULY 2025
	Checked		
	Design'd	TZ	JULY 2025
	Approved	EB	JULY 2025
			JULY 2025

THE UNIVERSITY OF BRITISH COLUMBIA
Information Technology

MAIN COMMUNICATION ROOM UTP TERMINAL (TYPICAL)

File No. ITSTD-06

Rev. 0