
NOTE: GUARD AGAINST ELCTROMAGNETIC AND ELECTROSTATIC HUM FOR UNBALANCED LINE LEVEL AUDIO SIGNAL, FLOAT CABLE SHIELD AT THE OUTPUT SOURCE DEVICE. UNCONNECTED SHIELD SHALL BE FOLDED BACK OVER CABLE JACKET AND COVERED WITH HEAT SHRINK TUBING. DO NOT CUT OFF UNUSED SHIELD.



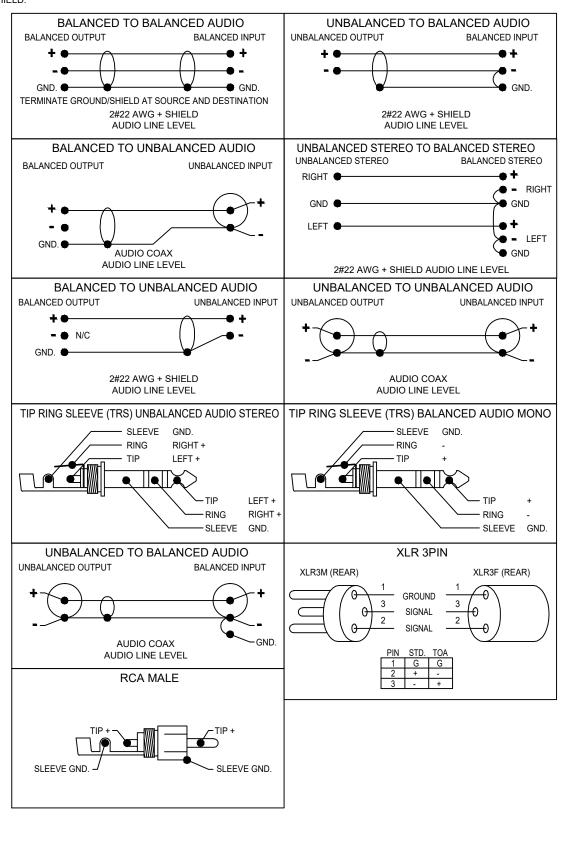

INFORMATION TECHNOLOGY Audio Visual Services

THE UNIVERSITY OF BRITISH COLUMB INFORMATION TECHNOLOGY AUDIO VISUAL SERVICES

1	MAR 27, 2020	CREATION
NO	DATE	REVISIONS

UBC TECHNICAL
GUIDELINES
DIVISION 27
UBCIT AV

TYPICAL AV WIRING 1 OF 3 AVSK-05

GS N.T.S. PROJECT # DATE MARCH 27, 2020